



Green Lion

THERMAL PRINTER

SKU: GNTHPRINTGY

Model No: GL-TP1

Table of Contents

Product Overview	2
Specifications	2
Product Sections	3
Operating Instructions	4
Safety Precautions	5
FAQ	6
Installing the Apps	8
Disposal	8
Warranty	9
Contact Us	9

Product Overview


The Green Lion Thermal Printer is a compact and efficient device designed for easy and precise label printing. It supports Bluetooth connectivity for seamless mobile editing and bulk printing, offering a wide range of templates in multiple languages. This printer accommodates paper widths up to 57mm and supports labels from 15mm to 50mm in width. It features a 203 DPI resolution for clear printing, along with a 1500mAh rechargeable battery for portability. With QR code logo printing and a simple user interface, it's perfect for on-the-go and business applications.

Specifications

Printing Technology	Thermal
Consumables	No toner, ink, or ribbon required
Connectivity	Bluetooth (Android, iOS), Type-C USB (Windows PC)
Maximum Paper Width	57mm
Maximum Label Roll Diameter	50mm
Battery	Rechargeable lithium battery (1500mAh x 7.4V)

Print Resolution	203 DPI
Single Charge	12-14 rolls printing
Display	TFT screen
Dimensions	62 x 86 x 128mm
Weight	292g
Bluetooth Name	GL-TP1

Product Sections

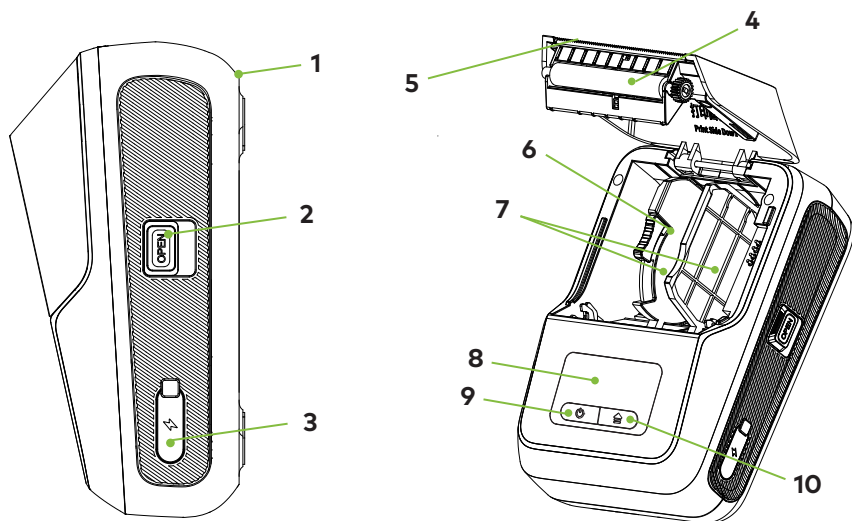


1. Lanyard Hole
2. Paper Cover Slide Switch
3. Type-C Charging Port
4. Rubber Roller
5. Paper Tear-up Blade
6. Baffle Lock
7. Sliding Baffles
8. TFT Display
9. Power/Setting Button
10. Feed Button/Ok Button

Operating Instructions

1. Power On the Printer: Press and hold the Power button for 1.5 seconds to turn on the printer.


2. Install the Label Paper

A. Slide the Paper Cover Switch to open the cover.

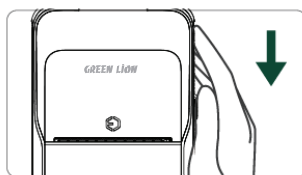


A

B. Push down the locking buckle on the orange baffle.

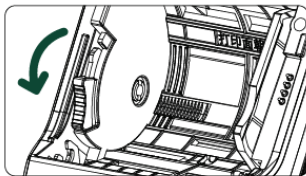


B

C. Place the label paper with the printable side facing down. Insert it in the center, adjust the baffles for a secure fit, lift the locking buckle, and close the paper cover firmly.

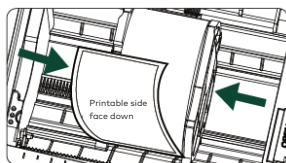

C

D. Press the Feed button to advance one label and align the paper automatically.

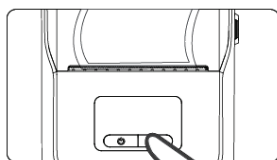

D

3. Download the App: Scan the QR code on the package to download the WePrint app, available for Apple and Android devices.

4. Connect the Printer via Bluetooth: Turn on Bluetooth on your mobile device and power on the printer. Open the WePrint app, connect to the printer, and tap Print after completing your design.

5. Auto Power-Off: The printer powers off automatically after a period of inactivity. The default standby time is 15 minutes and can be adjusted in the settings.

Safety Precautions


1. Before use, ensure the printer paper compartment is clean. Foreign matter in the compartment may damage the print head during printing. If debris is present, clean the paper compartment and print head.

Note: Do not use abrasive or corrosive materials to clean any components of the printer.

2. Please turn off the power immediately if a malfunction occurs.
3. Please do not disassemble printer by yourself, complicated circuits and devices inside it.
4. Recharge the printer only in a cool and well-ventilated area.
5. Do not expose the printer or power adapter to high temperatures, high humidity, or water, as this may cause a short circuit, battery overheating, smoke, deformation, damage, or explosion.
6. Immediately disconnect the power if the adapter comes into contact with water or other liquids.
7. If the printer or charger emits smoke or a burning odor, disconnect the charger immediately and avoid contact to prevent burns.
8. Do not squeeze, shake, disassemble, or modify the printer or power adapter.
9. Do not use the power adapter if the power cord is damaged, as this may cause electric shock, fire, or damage to the printer.
10. Always hold the power adapter when unplugging. Do not pull the power cord directly, as this may cause damage.
11. Do not use the printer near flammable materials or in locations such as gas stations or fuel warehouses.

FAQ

In case of poor printing, please use the degreasing cotton dipped in alcohol to gently wipe the printer engine which marked with a red frame in the figure below

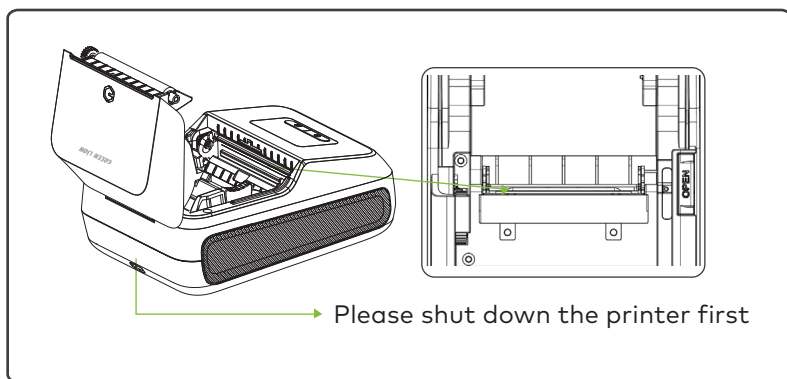

Q: How to connect the printer via phone's Bluetooth?

A: For Android, please make sure phone's Bluetooth & Position turn on, and connect the printer in App, not in the phone settings. For iPhone, please connect directly in the App, not in the phone settings.

Q: Why does the printer work normally, but keeps printing blank labels?

A: Damage caused by accidental, abuse, misuse, or use of Non-Original consumables.

Q: Why is the positioning inaccurate when printing transparent labels?

A: When printing transparent labels, please set the paper type to "Black" before printing, the default is "Gap". So please select the paper type to "Black" when creating a new template, or change it to "Black" before printing.

Q: Does the printer support batch printing?

A: Printer supports batch printing of Excel tables, the first row needs column titles, save the excel once done, send it to your mobile phone, then open the file and select the printer.

Installing the Apps

1. Install the Editing Application: Download the WePrint app from Google Play or the App Store, or scan the QR code on the package.
2. Print from a Computer: For PC, use the WeiDa Online Web label editing software via your browser. Printer driver installation is required. SDK files are available.



Disposal

This product must not be disposed of as unsorted household waste. It is important to separate such waste for proper treatment and recycling, in compliance with local waste management regulations.



Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **<https://www.greenlion.net/warranty>** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check:

<https://www.greenlion.net/warranty>

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: **<https://www.greenlion.net/>**

Sales: **sales@greenlion.net**

Service Support: **Support@greenlion.net**

Telegram: **[@greenlion_global](https://www.instagram.com/greenlion_global)**

Instagram: **[@greenlion_global](https://www.instagram.com/greenlion_global)**